



REQUEST FOR QUOTATION

(For Infrastructure Projects)

Company Name/TIN: _____
 Business Address: _____

Date: April 23, 2024
 PR No: 2024-03-0174

Please quote your lowest price on the item/s listed below, subject to the terms and conditions stipulated, and submit your quotation duly signed by your representative not later than **April 26, 2024; 05:00 P.M** in the return envelope to the BAC Secretariat, DSSC, Matti, Digos City, or email to psu@dssc.edu.ph.

TERMS AND CONDITIONS:	
1.	Completion of Works: <u>30</u> calendar days from receipt of Purchase Order.
2.	Price validity: <u>120</u> calendar days
3.	Documentary requirements: PhilGEPS Reg. Number, Mayor's Permit, PCAB License, SEC/DTI Cert., BIR Cert. of Reg., Omnibus Sworn Statement, & Income/Business Tax Return (For ABCs above P500K)
4.	The Approved Budget for the Contract for this procurement is, Php 470,959.96


RACHEL R. YONTING
Procurement Service Unit Head/BAC Secretariat

Item No.	Qty.	Unit	Item Description	ABC per Item	Unit Cost	Total Cost
1	1	Lot	Repair of Riprap and Fence (with attachments: Detailed plan, Detailed cost estimates and Scope of Work)		470,959.96	
GRAND TOTAL:						

Completion of Works: _____
 Price Validity : _____

After having carefully read and accepted your General Conditions, I/We quote you on the item/s at prices noted above. If the space for delivery period, warranty, and price validity are left blank, it means that I/ We concur with the terms and conditions specified by the Davao del Sur State College (DSSC).

Canvasser

Printed Name and Signature
 Contact Details:
 Landline: _____
 Mobile No. _____
 E-mail address: _____
 Date signed: _____



ISSUE STATUS	REV. NO.	EFFECTIVE DATE	PAGE NO.
01	00	09.01.2022	1 of 1

Name of Project: Repair of Riprap and Fence (18 meters)

Location: DSSC – Digos Campus, Matti, Digos City

SCOPE OF WORK

EARTHWORKS

- Structural Excavation (concrete pile cap and wall footing). **(Refer to plan)**
- Embankment **(Refer to plan)**
- Gravel fill including weep holes and drainage pipes. **(Refer to plan)**

PLAIN AND REINFORCED CONCRETE WORK

- Cutting and bending of deformed bars for concrete pile cap, wall footing and slab on fill. **(Refer to plan)**
- Fabricate concrete pile cap and footing forms.
- Install deformed bar reinforcements on concrete pile cap, footings, wall footing and slab on fill.
- Concrete pouring on concrete pile cap, wall footing, and slab on fill. (Structural Concrete: 20.7MPa Compressive Strength at 28 days)


STEEL WORKS

- The fence dimensions and materials shall be the same with the existing fence.
- Pipe pile installation. **(Refer to plan)**


Prepared by:


Engr. Von L. Del Rosario
PDO STAFF

Checked/ Reviewed by:


Engr. Bon Andrey L. Armmento
PDO II

Checked/ Reviewed by:


Engr. Clara A. Acebes
PPDME DIRECTOR

Approved by:


Augie E. Fuentes, PhD.
COLLEGE PRESIDENT



Name of the Project: **REPAIR OF RIPRAP AND FENCE**
 Location: **DAVAO DEL SUR STATE COLLEGE CAMPUS**
 Scope of Work: **As per Item Number**
 CD **30** DAYS

COST ESTIMATES

Quantity	Unit	Item Description	Unit Cost	Amount
Item A.1 : Earthworks				
42.00	cu.m.	Embankment	420.00	17,640.00
Item A.2 : Dike Construction, Class "A"				
295.00	bags	Portland Cement	230.00	67,850.00
16.50	cu.m	Sand	1,000.00	16,500.00
33.00	cu.m	Gravel G-1	1,200.00	39,600.00
6.00	lgth	4" Dia. B.I. Pipe, Schedule 40 seamless	7,800.00	46,800.00
24.00	lgth	16mm Dia. Def. Round Bar	440.00	10,560.00
163.00	lgth	12mm Dia. Def. Round Bar	240.00	39,120.00
30.00	kgs	Ga.# 16 Tie Wire	90.00	2,700.00
12.00	pcs	Weepholes (50mm PVC)	300.00	3,600.00
12.00	cu.m	Fine Gravel G-1	1,200.00	14,400.00
5.00	sq.m	Filter Cloth	280.00	1,400.00

Consumables(10% of Labor Cost)

Material Cost	244,990.00
Equipment cost	85,504.00
Labor Cost	24,600.00
CP Profit(10 %)	35,509.40
Sub-total	390,603.40

Item A.3 : Formworks and Falseworks

6.00	pcs	Ordinary Plywood	340.00	2,040.00
200.00	bd.ft.	Coco Lumber	22.00	4,400.00
6.00	kgs.	Assorted Common Wire Nails	76.00	456.00
		Consumables (5% of Materials Cost)		22.80

Consumables(10% of Labor Cost)

Material Cost	8,948.56
Equipment cost	
Labor Cost	22,327.36
CP Profit(10 %)	3,127.59
Sub-total	34,403.51

Item A.3 : Cylone Wire Fence

11.00	pc	1 1/4" Dia Sch 40 GI Pipe	1,250.00	13,750.00
3.00	roll	5ft x 3.0m Gauge 10 GI Cyclone Wire	2,500.00	7,500.00
2.00	roll	4 Pt. Barbed Wire	1,800.00	3,600.00
2.00	lgth	10mm Dia. Def. Round Bar	200.00	400.00
8.00	kgs	Welding Rods	170.00	1,360.00
5.00	pc	Cutting Disc	60.00	300.00

Consumables(10% of Labor Cost)

680.00



ISSUE STATUS	REV. NO.	EFFECTIVE DATE	PAGE NO.
01	00	09.01.2022	1 of 1


Material Cost	27,590.00
Equipment cost	7,385.50
Labor Cost	6,800.00
CP Profit(10 %)	4,177.55
Sub-total	45,953.05

Material Cost	281,528.56
Equipment cost	92,889.50
Labor Cost	53,727.36
CP Profit(10 %)	42,814.54
TOTAL	470,959.96

Prepared by:


 ENGR. VON L. DEL ROSARIO
 PDO STAFF

Checked/ Reviewed by:


 ENGR. BON ANDREY L. ARMAMENTO
 PDO II

Recommending Approval:


 ENGR. CLARA A. ACEBES
 PPDME DIRECTOR

Approved by:


 LUCIE E. FUENTES, Ph.D.
 COLLEGE PRESIDENT



(+63) 9339924-0793

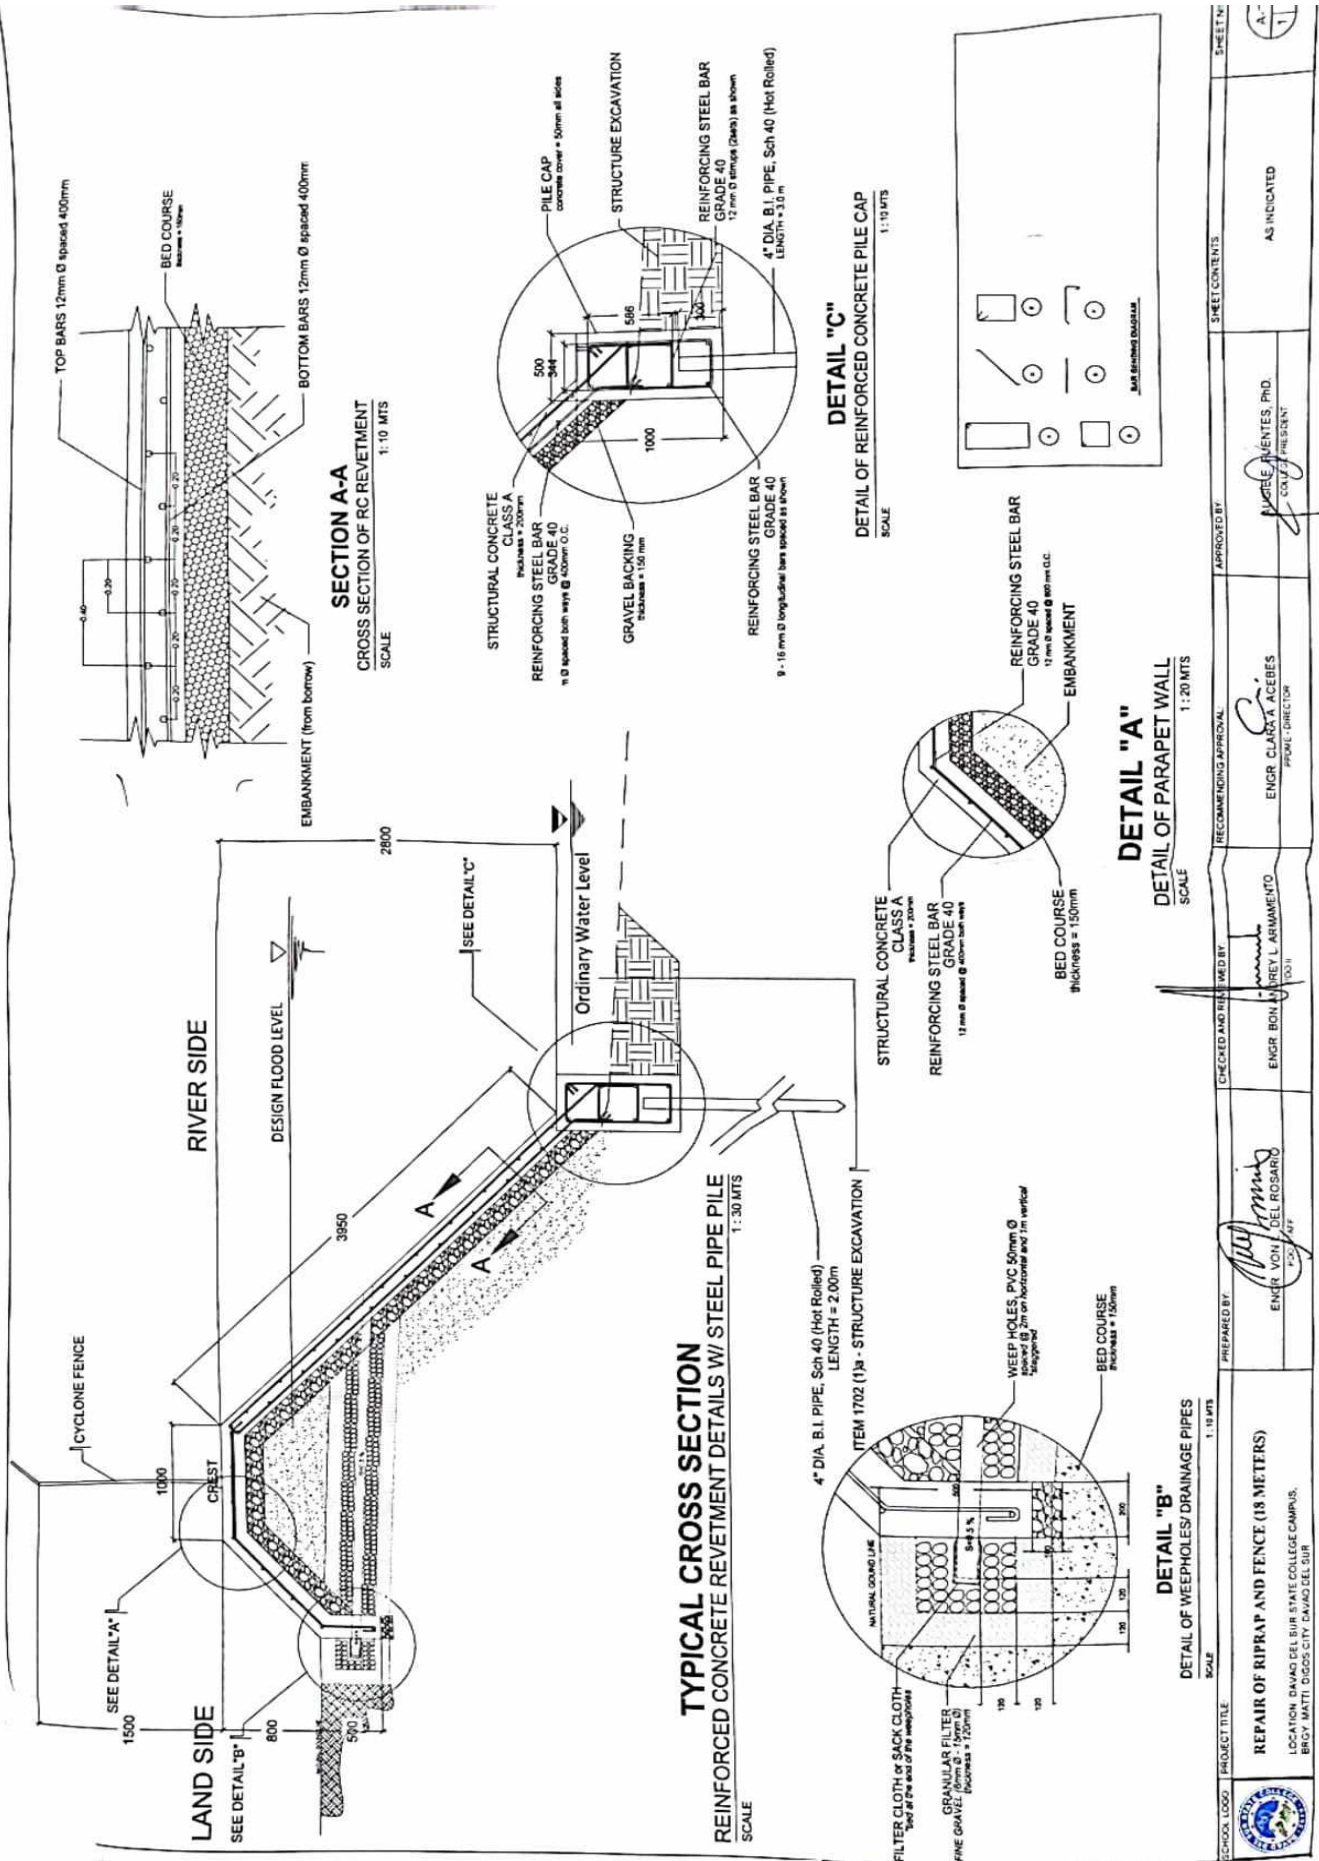


op@dssc.edu.ph



www.dssc.edu.ph





SHEET NO.	AS INDICATED		
	A		
APPROVED BY	 ENGR. CLARA A. ACEBES PROJECT DIRECTOR		
CHECKED AND REVISIONED BY	 ENGR. BONIFACIO L. ARMENTANO D-202-011		
RECOMMENDING APPROVAL	 ENGR. VON DEL ROSARIO P-202-012		
PROJECT TITLE	REPAIR OF RIPRAP AND FENCE (18 METERS) LOCATION: DAVAO DEL SUR STATE COLLEGE CAMPUS, BRGY. MATTI, DIGOS CITY, DAVAO DEL SUR		
PREPARED BY	 ENGR. VON DEL ROSARIO P-202-012		
SHEET CONTENTS	AS INDICATED		